


Contemporary Lighting™

PRODUCT NAME: Circuit 3LT Pendant
ITEM NUMBER: E24743

Please consult your electrician for hanging fixture and wiring.

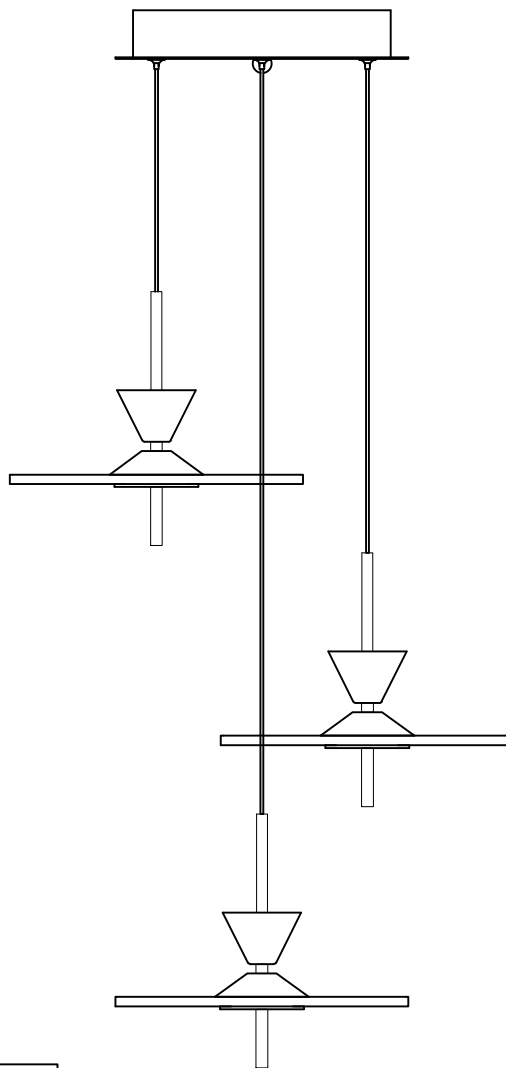

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

Lutron MACL-153M

Lutron DVL-153P

Lutron SCL-153P

Leviton IPL06-10Z

Leviton 6674-POW

Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.


WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

Bulbs (Included):3*LED*12W

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation



Plastic
Expansion
Screw(A)




Bracket (B)



Mounting
Screws(C)





Screws(D)




Canopy(E)


Locate all hardware & components before discarding packaging

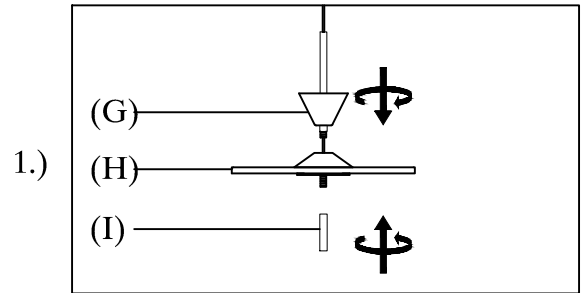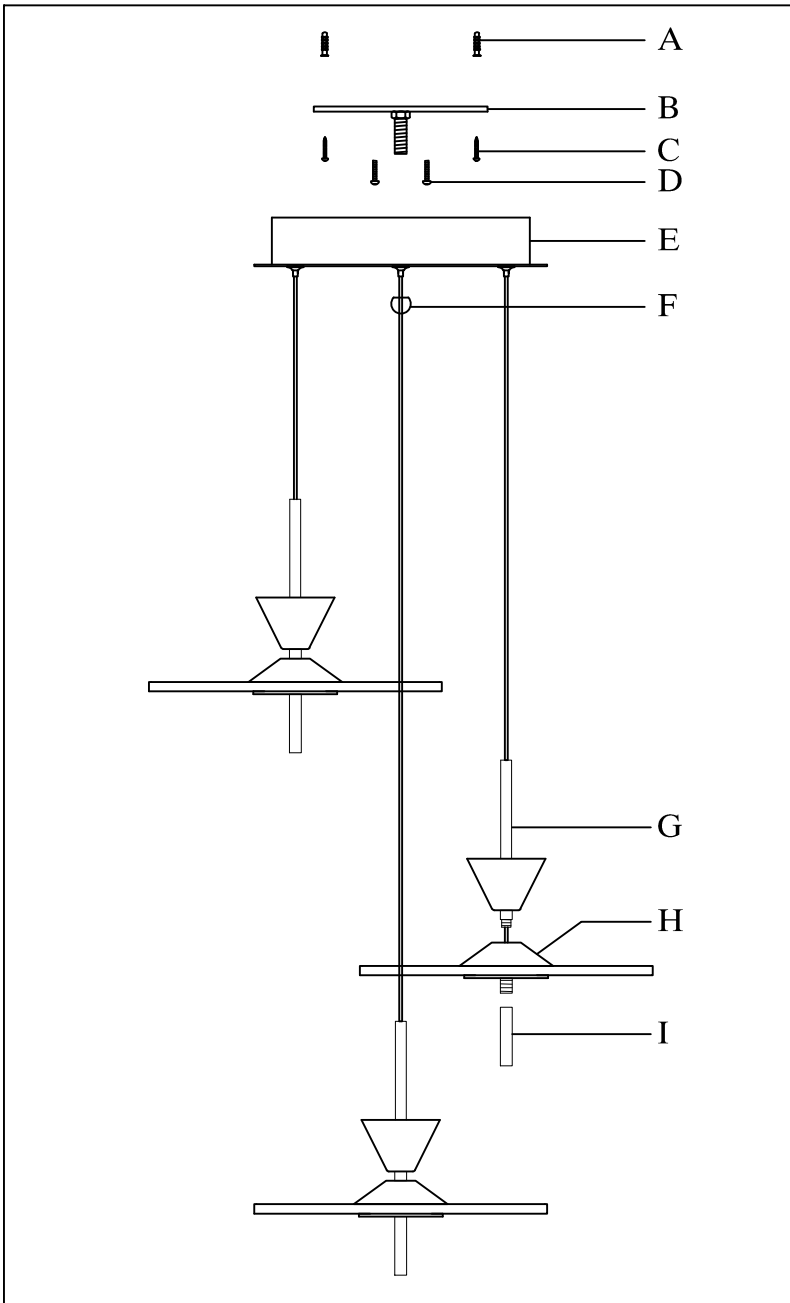

1.) Step1 :Install decorative tube(G) and cylindrical iron(I) to acrylic(H).

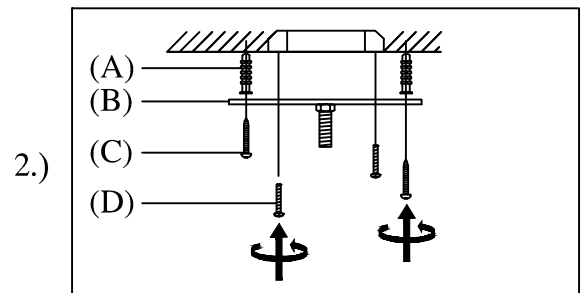


2.) Step2 :Remove mounting bracket from fixture and install to electrical box.

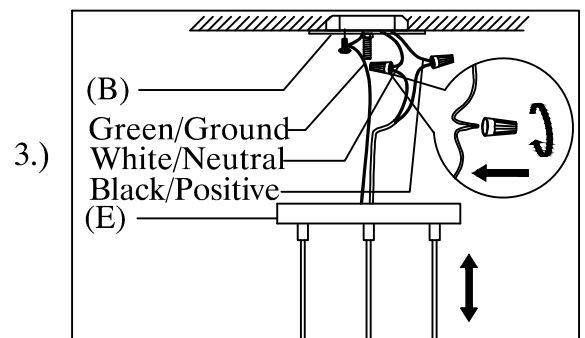



3.) Step3 :Adjust wire length to desired mounting height, and tighten strain relief screws to secure. Wire fixture to wires in outlet box. Green wire is for Ground.

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.

IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation

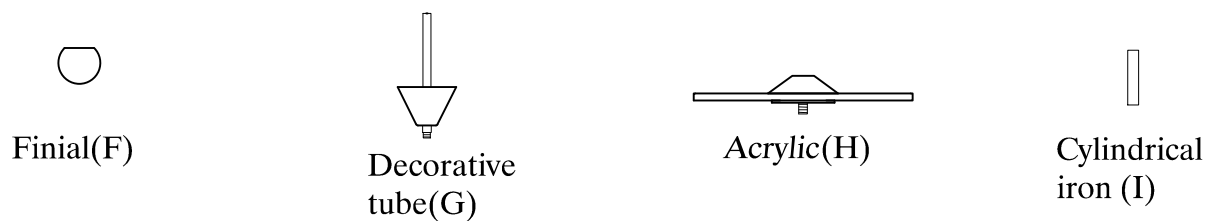

Locate all hardware & components before discarding packaging

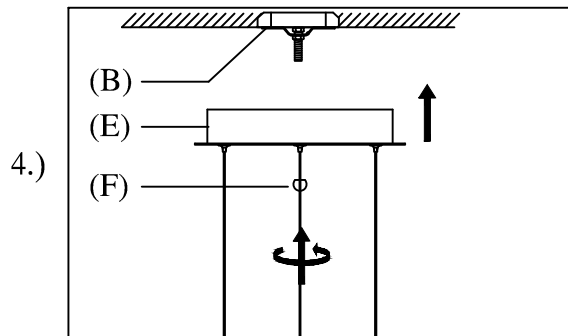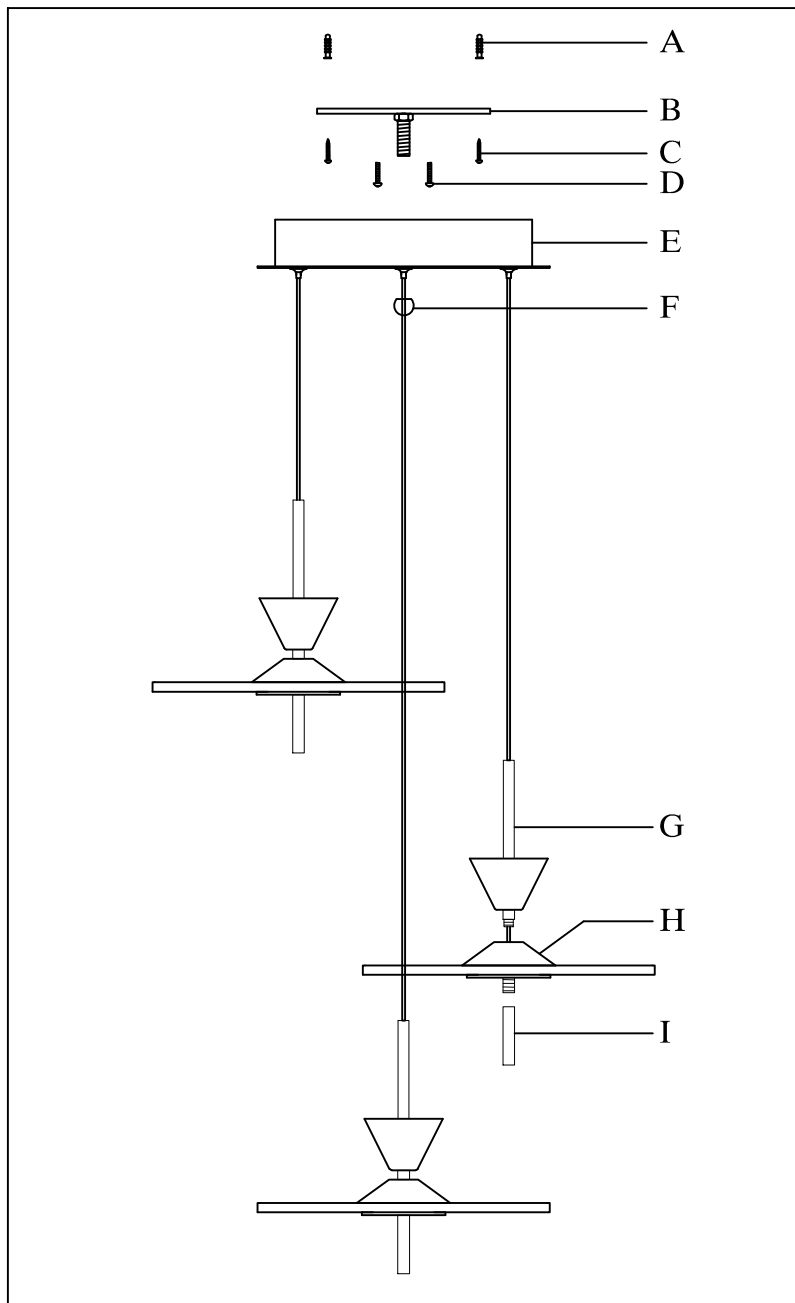

Step 4: Install fixture to bracket(B) using finial (F) to secure.

Cleaning & Care:
Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.